

SPECIFICATION

PRATIKA 205 S

PRATIKA 205 S VARIOMATIC

TECHNICAL DATA


- Retractable shaft
- Fixed and mobile keypad
- Ladder pack brake
- Universal basket with rotation and sliding system
- 15 Position ladder block
- Head with fixed wheels and controls
- Cable storage
- External shaft block
- Wheels for side movement
- Motor 205S variomatic with voltage selector 3kw-2,5kw and automatic slowdown

PERFORMANCE


Height	21 m
Maximum capacity	200 kg
Total weight	750/900 kg
Profile dimensions	U 250 U 75
Operation electrical	1,2 kw
Safety	CE Standards



LADDER DIMENSIONS PRATIKA 205 S - 205 S VARIOMATC

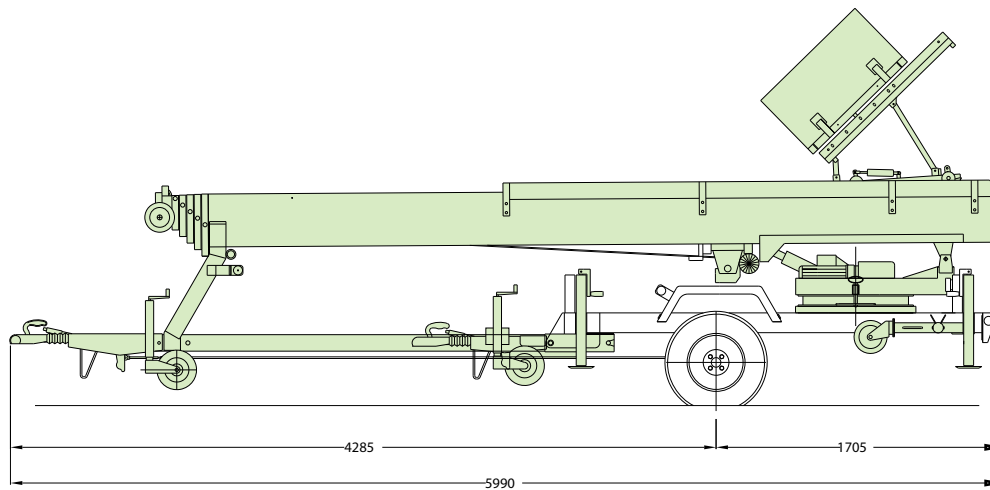

KEY POINTS

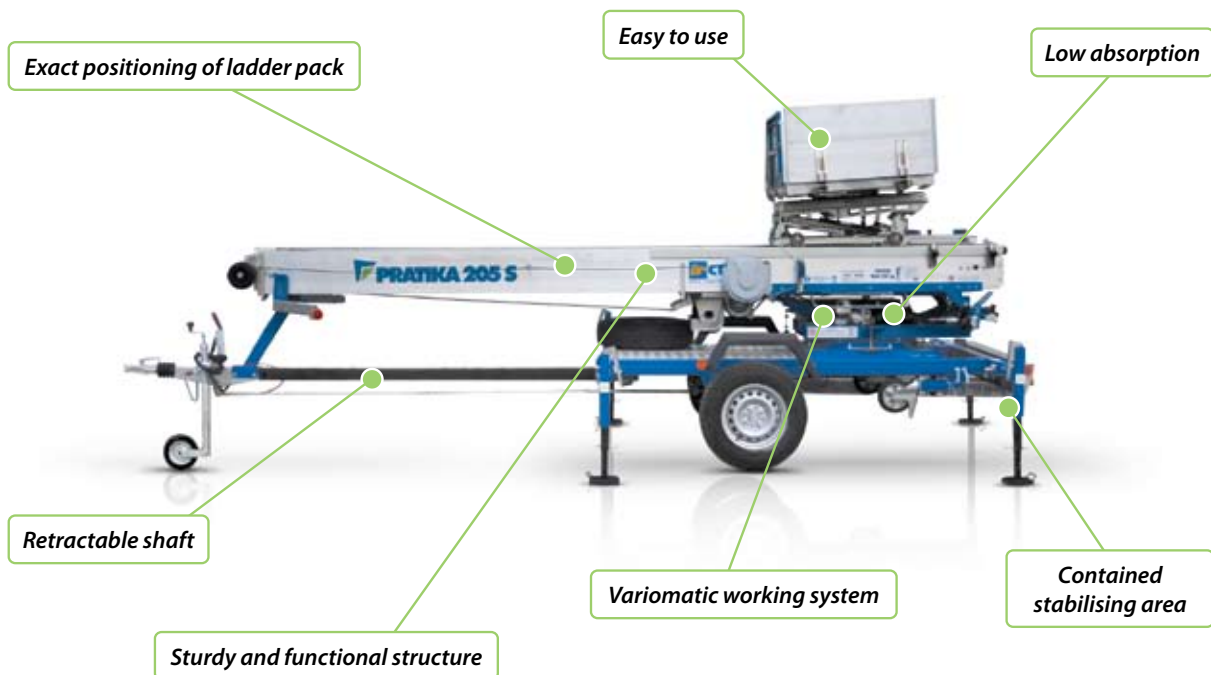

CTE S.p.A. | www.ctelift.com

Sales Office Dolo (Ve) - dolo@ctelift.com
 ph. +39 041 51.00.130 - fax +39 041 41.38.44
 Headquarter Rovereto (Tn) - info@ctelift.com
 ph. +39 0464 48.50.50 - fax +39 0464 48.50.99
 Milano Branch S. Giuliano Milanese (Mi) - milano@ctelift.com
 ph. +39 02 98.81.100 - fax +39 02 98.28.20.96
 Bertinoro Branch & Factory (FC) - bertinoro@ctelift.com
 ph. +39 0543 44.88.30 - fax +39 0543 44.83.43

