

ARTICULATED TRUCK MOUNTED PLATFORMS



SPECIFICATION


ZED 17L on Iveco Daily

TECHNICAL DATA


- Double pantograph + telescopic boom (main boom + one extension)
- Sigma boom movement enabled by connecting rods
- 360° continuous turret rotation on bearing turntable
- Individual proportional electro-hydraulic controls in basket
- Engine start and stop controls from the basket
- Anti-slip aluminium flatbed decking with tool tray walls
- Basket base in composite material with aluminium guardrails
- 65° right + 65° left hydraulic basket rotation

- Basket levelling at hydraulic parallelogram
- N° 4 hydraulic outrigger with ground pressure contact
- Hydraulic system operated by vehicle's PTO
- Buzzer indicating when PTO engaged
- Hour meter
- 230V AC EC electrical socket in the basket
- Standard blue (RAL 5017) or white (RAL 9010) paint work
- CE certified

TRANSIT DIMENSIONS

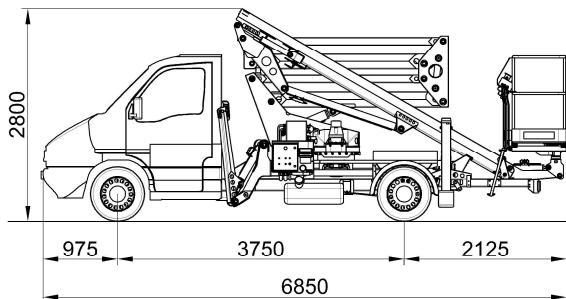

WORKING ENVELOPE and OUTRIGGER FOOTPRINT

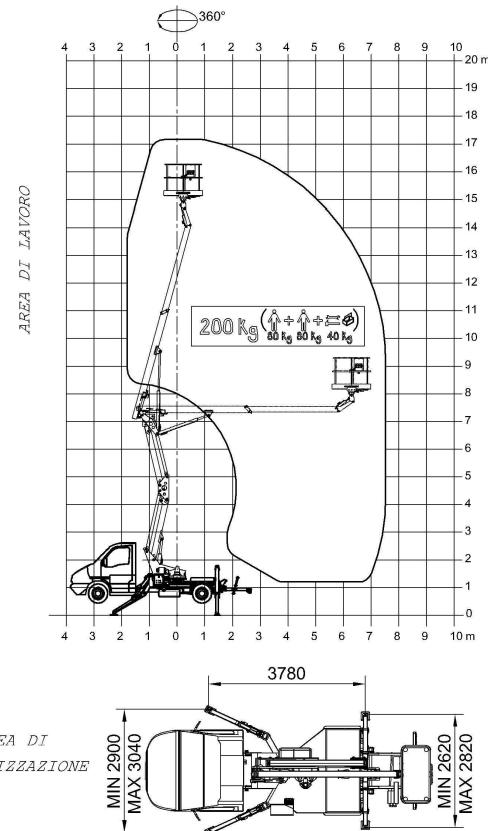

PERFORMANCE

Working height	17,2m
Platform height	15,2m
Working outreach	7,7m
Capacity	200kg
Basket dim.	1400x700x1100mm
GVW minimum	3,5t

CTE S.p.A. | www.ctelift.com

Sales Office Dolce (Ve) - dolce@ctelift.com
ph. +39 041 51.00.130 - fax +39 041 41.38.44
Headquarter Rovereto (Tn) - info@ctelift.com
ph. +39 0464 48.50.50 - fax +39 0464 48.50.99
Milano Branch S. Giuliano Milanese (MI) - milano@ctelift.com
ph. +39 02 98.81.100 - fax +39 02 98.28.20.96
Bertinoro Branch & Factory (FO) - bertinoro@ctelift.com
ph. +39 0543 44.88.30 - fax +39 0543 44.88.43


SPECIFICATION

ZED 17L on Mercedes Sprinter


TECHNICAL DATA

- Double pantograph + telescopic boom (main boom + one extension)
- Sigma boom movement enabled by connecting rods
- 360° continuous turret rotation on bearing turntable
- Individual proportional electro-hydraulic controls in basket
- Engine start and stop controls from the basket
- Anti-slip aluminium flatbed decking with tool tray walls
- Basket base in composite material with aluminium guardrails
- 65° right + 65° left hydraulic basket rotation
- Basket levelling at hydraulic parallelogram
- N°4 hydraulic outrigger with ground pressure contact
- Hydraulic system operated by vehicle's PTO
- Buzzer indicating when PTO engaged
- Hour meter
- 230V AC EC electrical socket in the basket
- Standard blue (RAL 5017) or white (RAL 9010) paint work
- CE certified

TRANSIT DIMENSIONS

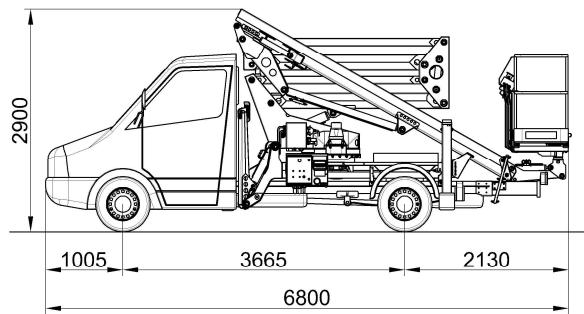

WORKING ENVELOPE and OUTRIGGER FOOTPRINT

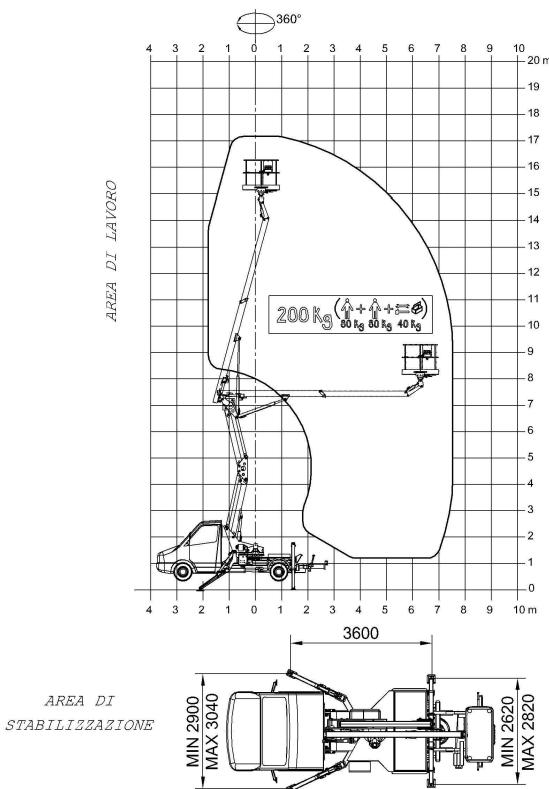

PERFORMANCE

Working height	17,2m
Platform height	15,2m
Working outreach	7,7m
Capacity	200kg
Basket dim.	1400x700x1100mm
GVW minimum	3,5t

CTE S.p.A. | www.ctelift.com

Sales Office Dolo (Ve) - dolo@ctelift.com
ph. +39 041 51.00.130 - fax +39 041 41.38.44
Headquarter Rovereto (Tn) - info@ctelift.com
ph. +39 0464 48.50.50 - fax +39 0464 48.50.99
Milano Branch S. Giuliano Milanese (Mi) - milano@ctelift.com
ph. +39 02 98.81.100 - fax +39 02 98.28.20.96
Bertinoro Branch & Factory (FC) - bertinoro@ctelift.com
ph. +39 0543 44.88.30 - fax +39 0543 44.88.43