

Available also with frontside covering steel sheet




SWINGING BUFFER: it manages to follow truck's suspensions adjustments during loading/offloading procedures **80% WEAR ENDURANCE INCREASE** (comparing with TAM2/3F)

STEEL SHOCK ABSORBING BUFFER, with inner absorbing pucks in anti-wearing low coefficient of failure for torsion SBR rubber **MORE CONVENIENCE AND ENDURANCE!**


TAM LINE: SHOCK ABSORBING DOCK BUMPERS

RUBBER BUMPERS

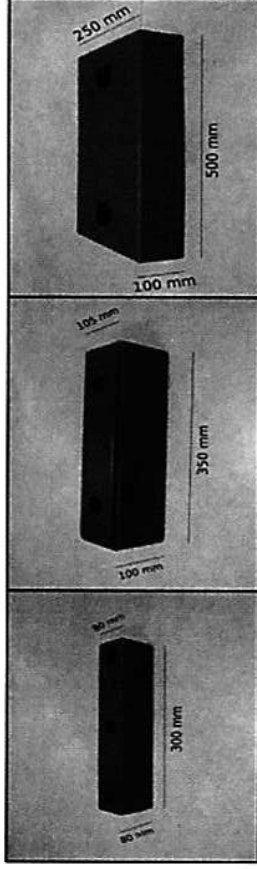


CODE	DESCRIPTION	length (mm)	width (mm)	thickness (mm)
TAM3F	SBR Rubber slim bumper	300	70	65
TAM2F	SBR Rubber medium bumper	350	105	100
TAMSPEC	SBR Rubber big bumper	500	250	100

RUBBER BUMPERS WITH METAL SUPPORTS

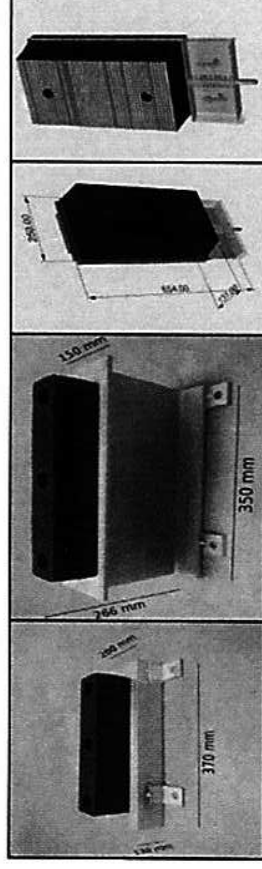

CODE	DESCRIPTION	length (mm)	width (mm)	thickness (mm)
TAM.U	TAM3F + steel U profile	370	200	130
TAM.IPE	TAM3F + steel IPE160 profile	350	150	266
GLTH	TAMSPEC + swinging spring system	750	250	130
GLTH.ACC	GLTH + front galv.steel plate	750	250	140

SPECIAL BUMPERS

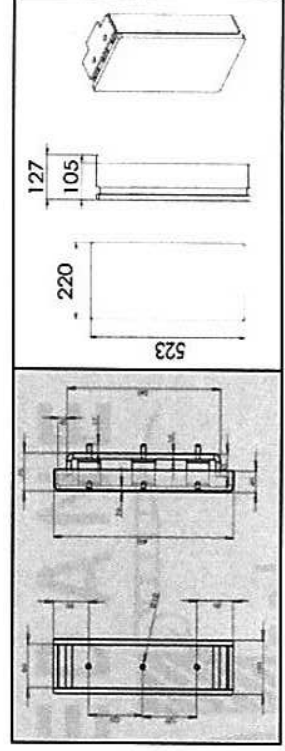

CODE	DESCRIPTION	length (mm)	width (mm)	thickness (mm)
VTM	modular bumper with 10mm steel sheets and 70mm rubber disks	420	110	70
T.REX	Modular bigsize bumper with front-rear steel plates + inner rubber parts	523	220	105