

PFEIFER-RENFROE clamp model CA


with pivoting lifting shackle and clever pressure distribution

The large cam jaw enables wide pressure distribution and thus guarantees careful handling of your sensitive goods.


For vertical lifting and 180° turning of sheets, steel plates, girders and structural steel elements. The pivoting shackle enables easy handling due to unmatched attachment angles. Even lateral attachment to the load is allowed.

The lifting clamp incorporates the “look open” and “lock closed” feature. After relieving and securing the load, the clamp can be lifted off with a crane. Can be released remote-controlled through a “tag-line”.


For wider loads we recommend the use of clamps in pairs attached to a double-leg sling or to a spreader beam.



Lifting clamps and grabs

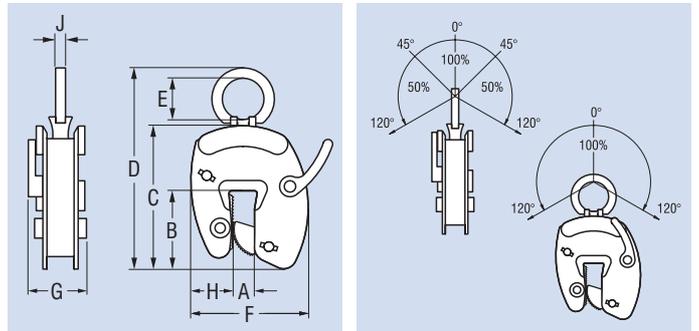

| SWL kg | Gripping range A mm | Dimensions in mm | | | | | | | | Weight approx. kg | Reference no. |
|--------|---------------------|------------------|-----|-----|-----|-----|-----|-----|----|-------------------|---------------|
| | | B | C | D | E | F | G | H | J | | |
| 3200 | 3-35 | 130 | 280 | 415 | 80 | 215 | 110 | 80 | 19 | 13 | 120813 |
| 3200 | 35-70 | 130 | 280 | 415 | 80 | 245 | 110 | 68 | 19 | 14 | 120863 |
| 5000 | 5-45 | 145 | 350 | 510 | 90 | 300 | 120 | 100 | 19 | 25 | 120868 |
| 5000 | 45-85 | 145 | 350 | 510 | 90 | 335 | 120 | 80 | 19 | 27 | 120907 |
| 8000 | 10-65 | 205 | 430 | 610 | 90 | 350 | 140 | 120 | 32 | 41 | 120915 |
| 8000 | 65-120 | 205 | 430 | 610 | 90 | 400 | 140 | 105 | 32 | 43 | 120955 |
| 12000 | 10-80 | 185 | 495 | 710 | 100 | 450 | 180 | 150 | 32 | 70 | 120959 |
| 12000 | 80-150 | 185 | 495 | 710 | 100 | 480 | 180 | 120 | 32 | 73 | 120999 |

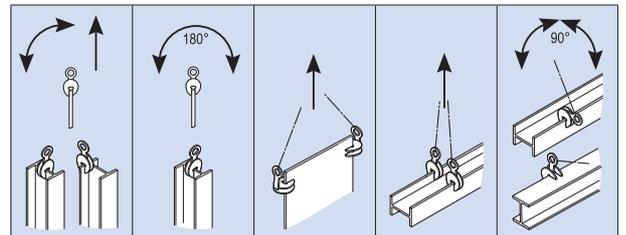

| | | | | | |
|--------|---|---|---|---|---|
| NM, SP | ● | | | | |
| SG | ● | ● | | | |
| G2 | ● | | | ● | ● |
| CA | ● | ● | ● | ● | ● |

For the main use of the clamp models on pages 80 to 82 please see the attached drawing.