

NEW 2014

# ALULIFT




UNI1004 EN280  
73/23/EWG  
93/68/EWG

### Base-set includes:

- Platform 950 x 1960 mm. Checker plate
- Batteries 2 x 12V DC. Charge cycles: 1000
- Remote controll
- 8 wheels
- Handrailing with gas-filled shock absorber
- Toeboards
- 2 pcs. frames, diagonal and horizontal braces with Alulock-system.

### Optimal Safety

- Build from below to top
- Controller in basket with emergency button
- Automatic stop by overload. Max. 250 kg.

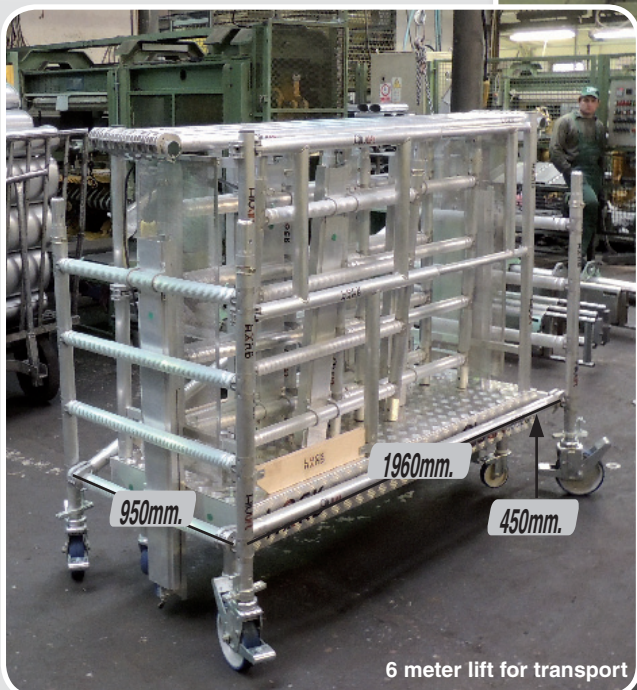

Heights from  
1-12 meter

Patent Pending:  
PCT/DK2010/050115 PA 2014 70054



# Adjustable platform with remote control

Can be build up till 12 meters



UNI1004 EN280  
73/23/EWG  
93/68/EWG

## Battery: 2x12V DC

Reliable performance

Operationtime: 1 hour non-stop. 6 m. up and down.

Maintenance Free

Charge cycles: 1000

Re-charging time: 6 hours

### Gear rack

Galvanized steel

Integrated in all frames

Easy assembling

### Safety Net

included on both  
short sides.

### Max. load

250 kg. / 2 persons + materials

### Railing

Railing with automatic close.  
Gas-filled shock absorber.

### Alulock-system

Included in all diagonal- and  
horizontal braces.

Patent Pending

PCT/2010/050115





### Frames

Wide: 950 mm. / 1390 mm.  
Height: 1000 mm.  
All with integrated gear rack.  
Easy and simple connection



### Platform

Build with railing in ground level.  
Adjustable in heights up till 12 meters.

3 different sizes: 660 x 1720 mm. (S)  
660 x 2400 mm. (M)  
1100 x 2400 mm. (XL)

### Extention

Always build from below to top.

Adjustable up till 12 meters

### Wheels

All sets include 8 wheels

Serie S:

8 pcs. lockable Ø125 mm.

Serie M + XL:

4 pcs. lockable Ø125 mm.

4 pcs. adjustable Ø200 mm.

### Stability

3-point stabilizers - included for all sets with platformheight: 4 meter.


VIDEO







UNI1004 EN280  
73/23/EWG  
93/68/EWG

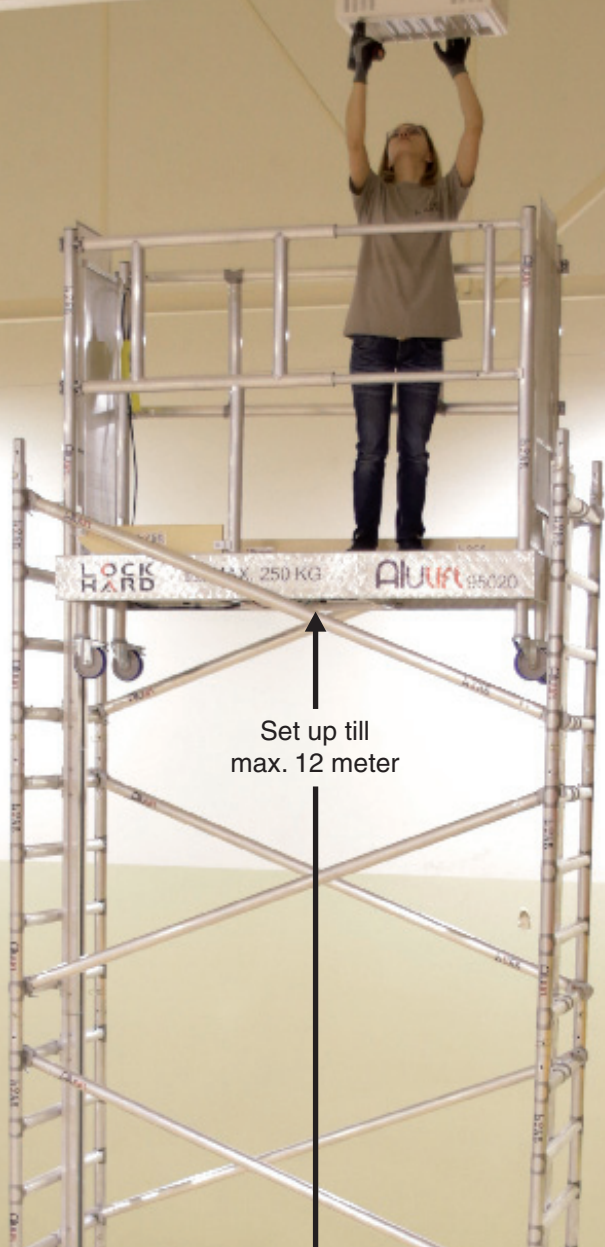

Set up till  
max. 12 meter



Article no. 100 S

**Accessories**

- 1 set stabilizers. 4 pcs.
- 1 set batteries 2 x 12V DC.
- 1 set adjustable wheels. Ø200 mm. 4 pcs.

Patent Pending  
PCT/DK2010/050115  
PA 2014 70054

Serie S			
Outside dim. 950 x 1960 mm. Size of platform: 660 x 1720 mm.			
Max. Height / m.	Articleno.	Weight	
1 meter	100 S	128 kg.	
2 meters	200 S	154 kg.	
3 meters	300 S	180 kg.	
4 meters	400 S	222 kg.	
5 meters	500 S	248 kg.	
6 meters	600 S	274 kg.	
7 meters	700 S	300 kg.	
8 meters	800 S	325 kg.	
9 meters	-	-	
10 meters	-	-	
11 meters	-	-	
12 meters	-	-	
1 m. extention	25,7 kg.		

Serie M			
Outside dim. 950 x 2640 mm. Size of platform: 660 x 2400 mm.			
Max. Height / m.	Articleno.	Weight	
1 meter	100 M	160 kg.	
2 meters	200 M	187 kg.	
3 meters	300 M	213 kg.	
4 meters	400 M	257 kg.	
5 meters	500 M	283 kg.	
6 meters	600 M	310 kg.	
7 meters	700 M	337 kg.	
8 meters	800 M	363 kg.	
9 meters	900 M	390 kg.	
10 meters	1000 M	416 kg.	
11 meters	1100 M	443 kg.	
12 meters	1200 M	470 kg.	
1 m. extention	26,6 kg.		

Serie XL			
Outside dim. 1390 x 2640 mm. Size of platform: 1100 x 2400 mm.			
Max. Height / m.	Articleno.	Weight	
1 meter	100 XL	181 kg.	
2 meters	200 XL	211 kg.	
3 meters	300 XL	240 kg.	
4 meters	400 XL	287 kg.	
5 meters	500 XL	316 kg.	
6 meters	600 XL	346 kg.	
7 meters	700 XL	376 kg.	
8 meters	800 XL	405 kg.	
9 meters	900 XL	435 kg.	
10 meters	1000 XL	464 kg.	
11 meters	1100 XL	495 kg.	
12 meters	1200 XL	524 kg.	
1 m. extention	29,6 kg.		

**NEW 2014**  
export@svelt.it

**ALULIFT**



www.svelt.com