
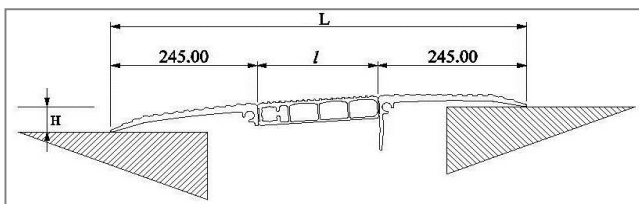


Aluminum extruded mobile ramp,
with double lip smooth connection.
Light weight and easy positioning
through 2 lateral handles

PERFECT FOR:

- Occasional loads/unloads
 - Low gradient
 - Rapid loading in points
- not specifically reserved
to these procedures

CAPACITY 6000 KG

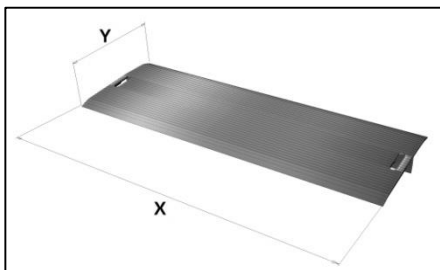

CODE	X	Y	H+/-	WEIGHT
	(mm)	(mm)	(mm)	(Kg)
DPC 50	1100	490	70/70	19
DPC 70	1100	690	90/90	26
DPC 90	1100	890	110/110	33
DPC 130	1100	1290	165/165	47
DPC 50A	1650	490	70/70	28
DPC 70A	1650	690	90/90	38
DPC 90A	1650	890	110/110	49
DPC 130A	1650	1290	165/165	70
DPC 50B	2000	490	70/70	34
DPC 70B	2000	690	90/90	47
DPC 90B	2000	890	110/110	59
DPC 130B	2000	1290	165/165	84

H+/- difference in height calculated according to UNI EN 1398
standard for **12,5% gradient** allowed for forklifts