



VIDEO

Matrix



ISO 9000
UNI EN 287/1
EN ISO 9606/2



Reinforcements on all step available (additional price)



One sided aluminium stool particularly suitable for use on machinery and in the building industry. Each step is firmly welded to the frame.



n.	m	m	m	cm	Kg
2	0,69	0,42	2,42	53,00	3,70
3	0,90	0,62	2,62	56,00	4,50
4	1,13	0,84	2,84	60,00	5,30

The platform is included in the number of steps



It is equipped with a strong and comfortable large non-skid aluminium platform.

The step-stool base is extremely wide to prevent side skidding and overturning even if the user is standing on the platform edges.

Two devices block any accidental opening:


- 1) Aluminium bars
- 2) Automatic platform

- Non-skid aluminium steps 8 cm
- Platform 40x30 cm
- Distance between steps 25 cm
- Ergonomic reinforced non-skid rubber feet
- Thermo-shrinkable plastic package with showcard


Width closed 16 cm

NEW

VERSATILE

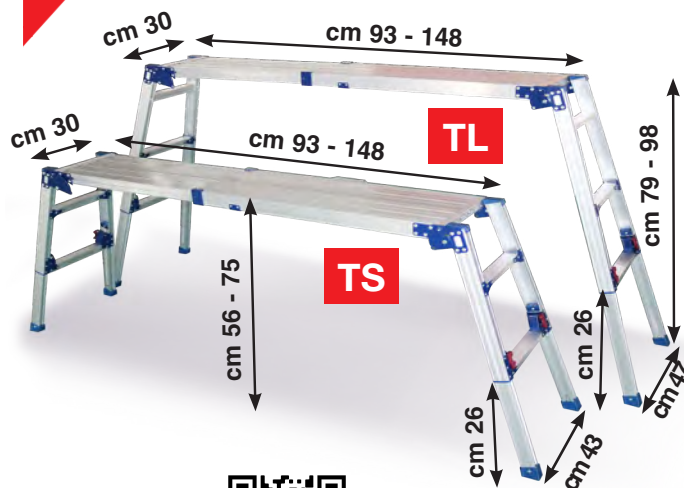

VIDEO



Each leg is adjustable and independent to overcome any obstacle

Telescopic multi-position stool in ribbed extruded aluminum for professional use. It is weatherproof. Two models, one lower with 2 steps plus platform and one higher with 3 steps plus platform. Compact, sturdy and foldable, it has an aluminum handle for transport. The aluminum working platform is telescopically extendable, doubling the operating length up to 1.48 m. Each leg is independent and telescopically adjustable to overcome slopes, obstacles and steps.



n.	min/max m	max m	max m	folded mm	Kg
Versatile TS	0,56/0,75	1,48	2,75	184x1041x394	10,0
Versatile TL	0,79/0,98	1,48	3,00	184x1042x432	13,0

- Opening of push-button supports with automatic locking
- Telescopic legs with quick and independent opening, adjustable by the toothed ring nut
- Quick-opening and telescopic push-button platform adjustable by toothed ring
- Step depth mm 50
- Distance between steps cm 30
- Screw-fixed non-skid rubber feet
- Carrying handle
- Thermo-shrinkable plastic package with showcard + carton box

Sturdy steel closing hinge



Platform opening button

