


CAPACITY 6000 KG

DETAILS

-Plate in aluminum extruded 6060 with 6000kg maximum capacity and anti-slip cross-ribbing surface treatment. Profile specifically engineered for concentrated loads with sloping front profile for perfect passage to undersliding telescopic lip
 -1000mm aluminum 6060 alloy telescopic lip with antislip surface, sliding under the main plate on side rails

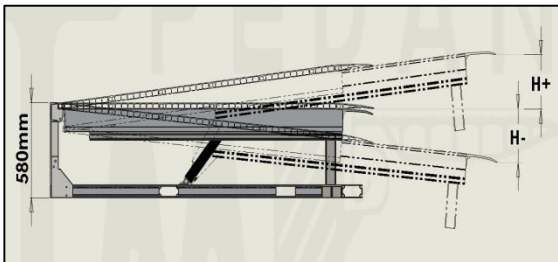

- Double effect lip control oil piston.
- Single effect plate lifting oil piston with parachute valve
- hydraulic control unit activated by three-phase engine
- Power panel according to CEI 20/22/2 (IP 55) standards with 7mts long connection cable included
- Standard TAM2F rubber buffers (see TAM LINE chpt.) included
- Anticrushing/shearing hinged carters.

CODE	X mm	Y mm	H+/- mm	H+/- mm
TSL250B	2000	2500+ LIP 1000	440/425	650
TSL300B	2000	3000+ LIP 1000	500/425	690
TSL250C	2200	2500+ LIP 1000	440/425	700
TSL300C	2200	3000+ LIP 1000	500/425	750

H+/- = difference in height calculated according to UNI EN 1398 standard for **12,5% gradient allowed for forklifts**